

## **TOUCH-SAFE SMALL HEATER (SEMICONDUCTOR)**

## CSK 060 | 10 W, 20 W



\_ ro

- > Low surface temperature
- > Double insulated (plastic housing)
- > Wide voltage range

- > Dynamic heating up
- > Clip fixing

The heaters are used in enclosures where condensation is to be prevented or the temperature may not fall below a minimum value. In this way corrosion is avoided and an even temperature is ensured. The heaters are designed for permanent operation.













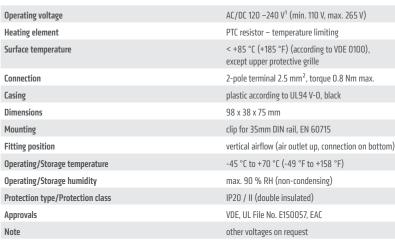

<sup>&</sup>lt;sup>1</sup> Operating with voltages below AC/DC 140 V reduces heating performance by approx 10 %.

## Example of connection

Heater CSK 060



Art. No.	Heating capacity <sup>2</sup>	Inrush current max.	Recommended pre-fuse T (time-delay)	Weight (approx.)
06040.0-00	10 W	1.0 A	2.0 A	0.2 kg
06030.0-00	20 W	2.5 A	4.0 A	0.3 kg