

Outdoor Air Conditioner OC 5708-230V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	570800001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12, 3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5708-230V

Cooling capacity / output L35L35:	750 W @ 50 Hz 780 W @ 60 Hz
Cooling capacity / output L35L50:	470 W @ 50 Hz 510 W @ 60 Hz
Heating capacity:	400 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	235 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 315 m ³ /h Cabinet air circuit: 165 m ³ /h
Mounting:	External
Dimensions (H x W x D):	830 x 315 x 270 mm
Weight:	30 kg
Rated operating voltage / frequency:	230V - 50/60 Hz ~N
Rated current L35L35:	3.7 A
Starting current:	10 A
Max. current:	3.8 A
Power consumption L35L35:	580 W
Max. power consumption:	780 W
Fuse rating:	5 A (T)
Connection:	Connection terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).


> [Overview product group Cooling units - Outdoor](#)

Performance Graph:

T = Ambient temperatur
 P = Cooling capacity

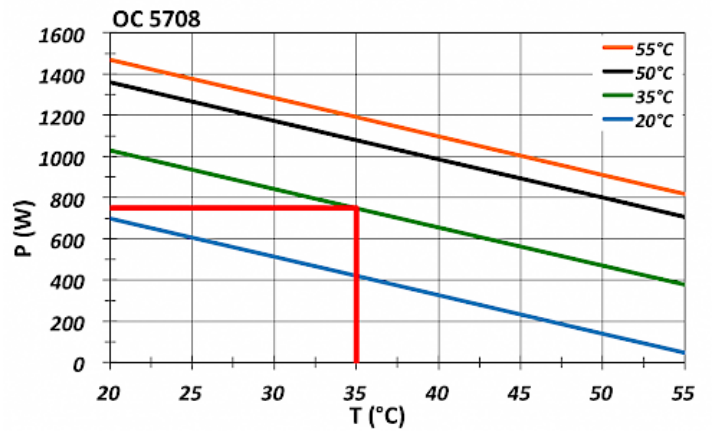

click image to enlarge

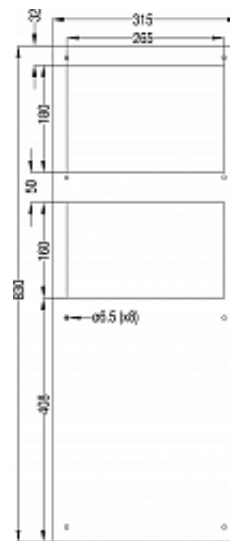Cutout diagram:


click image to enlarge

[Datasheet](#) created 27.04.2015 (15:11:45). Technical rights reserved.