

## Outdoor Air Conditioner OC 5720-400V



### Product Description

<b>Brand name:</b>	SoliTherm ComPact Outdoor
<b>Order Number:</b>	572020001
<b>Colour:</b>	RAL 7035
<b>Protection category IP (IEC 60 529):</b>	IP 56 (NEMA 12, 3, 3R, 4)
<b>Approvals:</b>	CE
<b>Customs tariff number:</b>	84158200
<b>Material housing:</b>	Mild steel, powder coated

## Technical data OC 5720-400V

<b>Cooling capacity / output L35L35:</b>	2 kW
<b>Cooling capacity / output L35L50:</b>	1.63 kW
<b>Heating capacity:</b>	1,000 W (optional)
<b>Compressor:</b>	Reciprocating compressor
<b>Refrigerant:</b>	R134a
<b>Refrigerant charge:</b>	480 g
<b>Operating temperature range:</b>	-20°C - +55°C
<b>Max. air volume flow:</b>	Ambient air circuit: 655 m <sup>3</sup> /h Cabinet air circuit: 400 m <sup>3</sup> /h
<b>Mounting:</b>	External
<b>Dimensions (H x W x D):</b>	1,150 x 395 x 270 mm
<b>Weight:</b>	50 kg
<b>Rated operating voltage / frequency:</b>	400/460 V - 50/60 Hz 3~
<b>Rated current L35L35:</b>	3.1 A @ 400 V 2.7 A @ 460 V
<b>Starting current:</b>	5.7 A @ 400 V 6.4 A @ 460 V
<b>Max. current:</b>	3.6 A @ 400 V 3.2 A @ 460 V
<b>Power consumption L35L35:</b>	1,26 kW @ 400/460 V - 50 Hz 1,35 kW @ 400/460 V - 60 Hz
<b>Max. power consumption:</b>	1,42 kW
<b>Fuse rating:</b>	3 x 6 A (T)
<b>Connection:</b>	Connection terminal block

Click the graphics to download the originals.


More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


**Performance Graph:**

T = Ambient temperatur

P = Cooling capacity

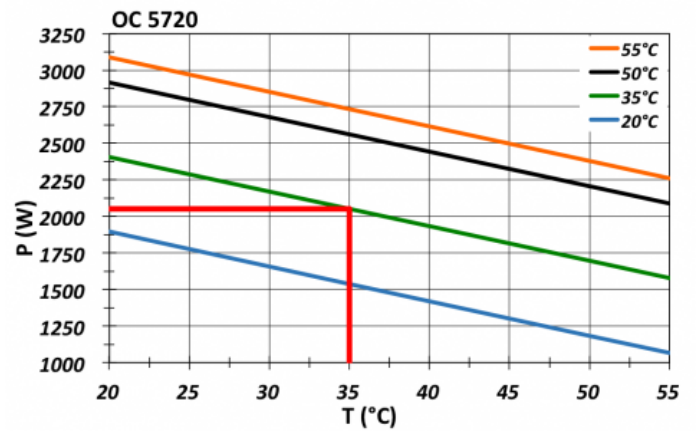

click image to enlarge

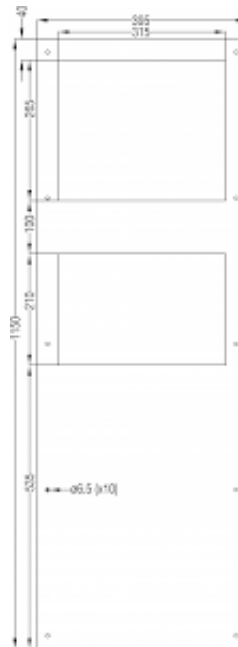**Cutout diagram:**


click image to enlarge

[Datasheet](#) created 22.07.2015 (12:17:25). Technical rights reserved.